
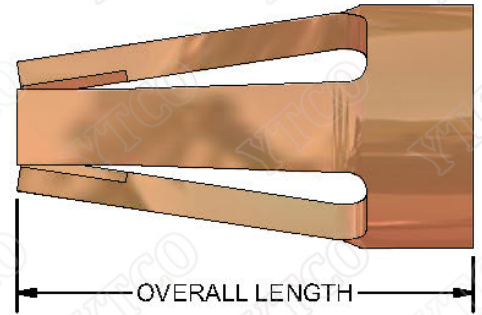



FOUR FINGER CLIPS(METRIC)

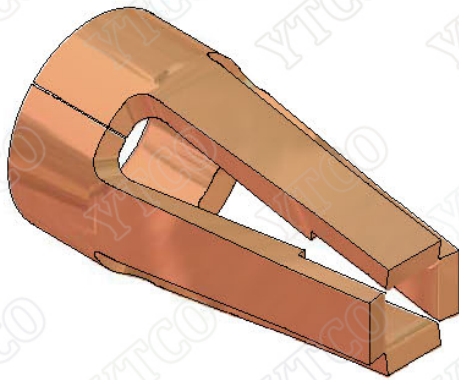

PART NUMBER (Code)	OUTSIDE DIAMETER	OVERALL LENGTH	OPERATING RANGE PIN DIA.	TEST PIN DIAMETER	MAXIMUM INSERTION FORCE	MINIMUM WITHDRAWAL FORCE
YTF-1S(411)	1.118	1.651	.381 - .559	.457	135 GM	25 GM
YTF-1SH(412)	1.118	1.651	.381 - .559	.457	260 GM	55 GM
YTF-3S*(432)	1.118	1.651	.381 - .559	.457	520 GM	120 GM
YTF-1L(413)	1.118	2.108	.381 - .559	.457	45 GM	15 GM
YTF-3*(430)	1.118	2.108	.381 - .635	.432	270 GM	90 GM
YTF-3H(431)	1.118	2.108	.381 - .635	.457	675 GM	200 GM
YTF-4(440)	1.346	2.972	.559 - .813	I - .660 W - .610	385 GM	50 GM
YTF-5(450)	1.753	3.810	.914 - 1.270	1.016 .762	325 GM 55 GM	60 GM 15 GM
YTF-6(460)	2.032	3.810	1.016 - 1.499	I - 1.270 W - 1.016	375GM	35 GM
YTF-7S(471)	1.626	2.413	.813 - 1.143	1.016	2.27 KG	200 GM
YTF-7(470)	1.613	3.048	.813 - 1.168	1.041 .991	350 GM	55 GM
YTF-7L(472)	1.626	3.048	.813 - 1.143	I - 1.016 W - .889	1.02 KG	110 GM
YTF-8(480)	2.235	3.150	1.219 - 1.626	I - 1.524 W - 1.270	440 GM	60 GM
YTF-9(490)	2.743	3.759	1.651 - 2.083	I - 1.880 W - 1.829	1.36 KG	230 GM

*-SIZING PIN DIAMETER IS .533.

NOTE:ALL CLIPS PRODUCED FROM BeCu ALLOY 172 1/2 HD AND HEAT TREATED AFTER FORMING.

ALL SPECIFICATIONS REFER TO CLIPS THAT ARE NOT PLATED.

THE ABOVE INFORMATION IS PROVIDED FOR REFERENCE ONLY. ENGINEERING DRAWINGS CAN BE PROVIDED.

YTCO TECHNOLOGY CO.,LTD.

3/F, ZhongYuGuan Industrial Park A2 Building, LongHua New District, ShenZhen, China

TELEPHONE:+86(755) 6196-1091

+86(755) 6196-1092

FAX:+86(755) 6196-1093

www.ytco.co

TECHNICAL PRODUCT DATA-REV. 17, 3/29/06