





RoHS Compliant

\*Due To Technical Progress, All The Information Provided Is Subject To Change Without Prior Notice.


Rev No	Revision note	Date	Signature	Checked
A/0	NEW DRAWING	DEC. 07. 2020		

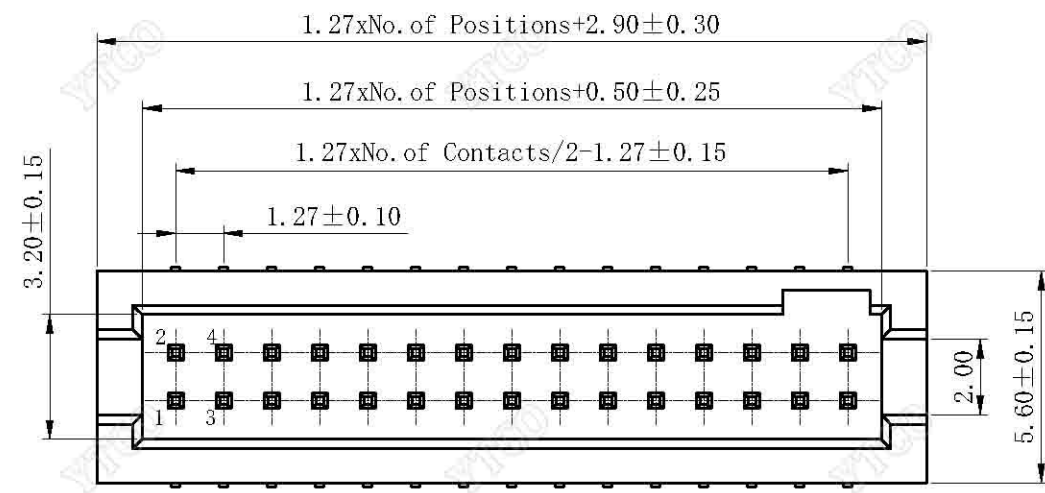

TYPE 1

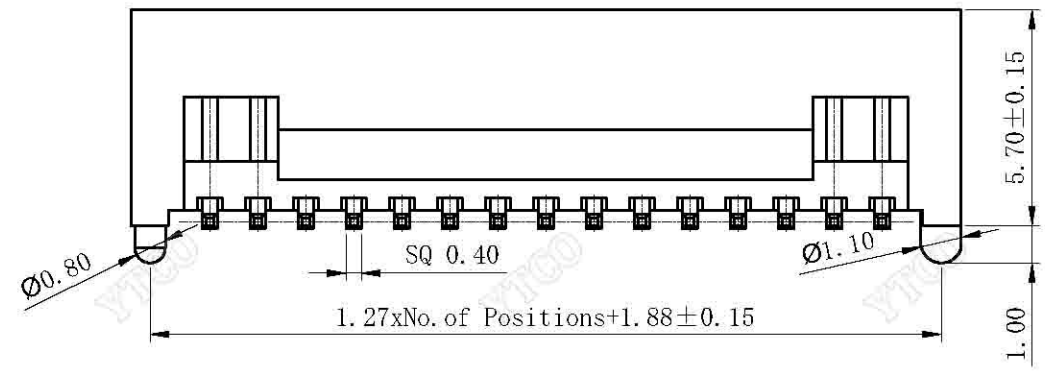

TYPE 2

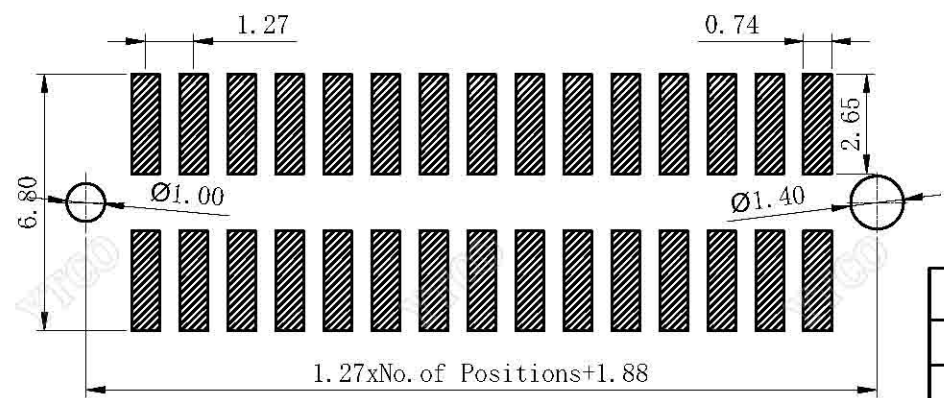

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE ±0.05)

**Electrical:**  
 Current Rating: 1.0AMP.  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 500V AC/DC.  
**Mechanical:**  
 Contact Material: Brass (SQ 0.40mm) .  
 Contact Plating: Au or Sn Over Ni.  
 Insulator Material: Polyester UL94V-0.  
 Standard: PA6T.  
**Environmental:**  
 Operating Temp Range: -40°C ~ +105°C.  
 Max. Processing Temp: +230°C for 30~60 Seconds.  
 +260°C for 10 Seconds

Ordering Code:

3032-XX M XX X 000 X XX

<b>No. of Pins</b> 06=6P 34=34P 08=8P 40=40P 10=10P 44=44P 14=14P 50=50P 20=20P 60=60P 24=24P 64=64P 26=26P 80=80P 30=30P 100=100P 32=32P	<b>Contact Plating</b> G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=GoldFlash/Tin SN=Tin SM=Matte tin	<b>Insulator Material</b> A=BK-PBT B=BK-PA6T C=BK-PA9T D=BK-LCP G=GY-PBT H=GY-PA6T	<b>Packing</b> A=Tray T=Tube P=Tube+CAP R=Tape& Reel+CAP	<b>Type</b> 01=Type 1 02=Type 2
--	---	--	--	---------------------------------------

ITEM	W(dimension)	Part No.	Mating
Standard	5.80	3032-XXMGOB000T01	2343
Alternate			

THIS DRAWING IS A CONTROLLED DOCUMENT

DRN: KAI XUAN XU DATE: DEC. 07. 2020

CHK: MIKE DATE: DEC. 07. 2020

APVD: PETER DATE: DEC. 07. 2020

UNITS: MM SCALE: 5 : 1 SIZE: A4

CAGE CODE: 594309442 FILE PATH: A/D/YTCOTZ/Box Header/1.27mm SHEET: 1 OF 1 REV: A

**YTCO TECHNOLOGY**  
 HTTP://WWW.YTCO.CO

TITLE: BOX HEADER, 1.27MM PITCH, SMT, H=5.70

PART NO: 3032-XXMXXX000XXX

DRAWING NO: 3032-M